



## 2FT G3 WP Batten Series – Turtle Safe / Bug Free / Eyewash

### Product Features

- 10w / 20w Dual Power Selectable
- 600mm
- 2 colours in one:  
Amber (Turtle Friendly/Bug Free\*)  
and Green (Eye wash)
- Ø20mm Conduit Entry
- 110° Beam Angle
- PC Base and Lens
- 600 x 95 x 80mm
- IP65 Housing
- IK08 Impact Rating
- Weight: 820g



Options:



Standard



Emergency



**TURTLE SAFE**



**BUG FREE**



**EYEWASH LIGHT**



**COLOUR SELECT**



**WATT SELECT**




### Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
WP-2FTG3-TLG	10/20w	200~240VAC	Amber / Green	2000 ~ 2200lm	110°	Grey	600x95x80mm
WP-2FTG3-TLG-E	Emergency Version						

# Product Specification

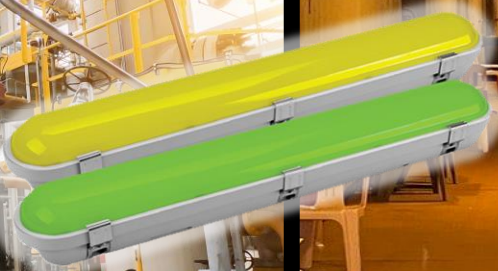

## 2FT G3 WP Batten - Turtle Safe / Bug Free / Eyewash - Standard

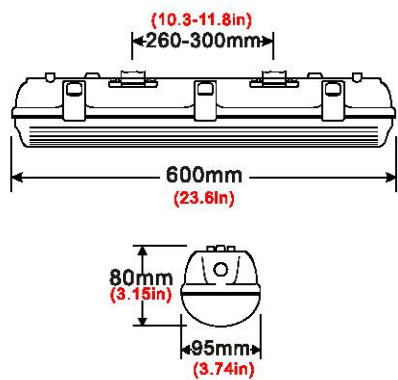

### Specification

Model	WP-2FTG3-TLG
Colour Temperature (2CCT)	Amber / Green (selectable)
Lumen (lm) @ 20w	2000lm ~ 2200lm
Efficiency (lm/w)	>100lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	110°
Power Requirement	200~240VAC
Power Consumption	10w / 20w selectable
Dimmable	No
Housing	PC Base and Diffuser
Lifespan	>50,000 hours
Operation Temperature	-20°C~+50°C
Product Dimension	600 x 95 x 80mm
Conduit Entry	Ø20mm
Impact Rating	IK08
Weight	820g
Protection Rating	IP65
Warranty	3 Years



TURTLE SAFE



BUG FREE



EYEWASH LIGHT

\* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.

Specifications are subject to change without notice


# Product Specification



## 2FT G3 WP Batten - Turtle Safe / Bug Free / Eyewash - Emergency

### Product Features

- Maintained / Non-Maintained Emergency Fitting

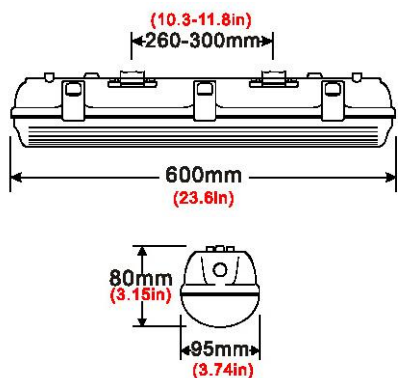

\* Whilst our testing using an amber light source has found it will attract approximately 90% less bugs than alternate light sources, there is still a risk of some bugs being attracted to our bug free lighting products.

### Specification

Model	WP-2FTG3-TLG-E
Colour Temperature (2CCT)	Amber / Green (selectable)
Lumen (lm) @ 20w	2000lm ~ 2200lm
Efficiency (lm/w)	>100lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	110°
Power Requirement	200~240VAC
Power Consumption	10w / 20w selectable
Emergency Power	5w
Emergency Run-Time	90 minutes
Housing	PC Base and Diffuser
Lifespan	>50,000 hours
Operation Temperature	-20°C~+50°C
Product Dimension	600 x 95 x 80mm
Conduit Entry	Ø20mm
Impact Rating	IK08
Weight	820g
Protection Rating	IP65
Warranty	3 Years

Specifications are subject to change without notice