



## 200w LED Flood Light with Polycarbonate Lens

### Product Features

- 200w
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Polycarbonate Face
- 90° Beam Angle
- 366 x 484 x 74mm
- IP66, IK10 Housing
- Weight: 6.5kg



Vandal Resistance  
**IK10**



### Specification Overview

Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FL-200W-PCT	200w	90~305VAC	4000K	26,636lm	90°	Black	366x484x74mm


# Product Specification



## 200w LED Flood Light with Polycarbonate Lens

### Specification

Model	FL-200W-PCT
Colour Temperature (1CCT)	4000K
Lumen (lm)	26,636lm
Efficiency (lm/w)	>139lm/w
Light Source	LED
CRI (%)	≥80
Beam Angle	90°
Power Requirement	90~305VAC
Power Consumption	191.3w
Dimmable	No
Housing	Diecast aluminium with polycarbonate lens
Lifespan	>50,000 hours
Operation Temperature	-20°C~+60°C
Product Dimension	366x 487 x 74mm
Impact Rating	IK10
Weight	6.5kg
Protection Rating	IP66
Warranty	5 Years

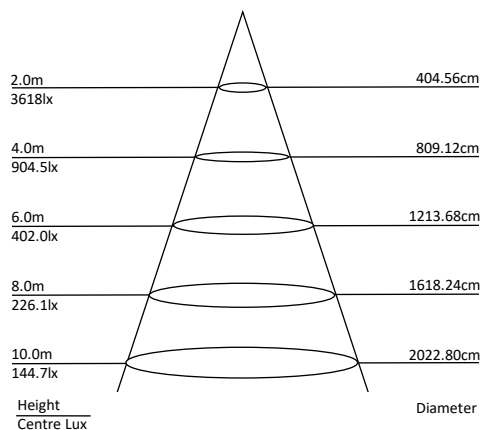

Specifications are subject to change without notice