



## 200w V19E Slimline LED Flood Light

### Product Features

- 200w
- Available in Neutral White (4000K) or Cool White (5000K)
- Quality Driver
- Full range power input 90~305VAC
- Aluminium die cast housing
- Tempered glass face
- 120° Beam Angle
- 445 x 392 x 56mm
- IP66 Housing
- Weight: 5.4kg



### Specification Overview




Model	Power	Power Requirement	Colour Temp	Lumens	Beam Angle	Trim Colour	Dimensions
FLA-SC200W-T19E	200w	90~305VAC	4000K	24,779lm	120°	Black	445x392x56mm
FLA-SC200W-V19E	200w	90~305VAC	5000K	25,545lm	120°	Black	445x392x56mm

# Product Specification




## 200w V19E Slimline LED Flood Light

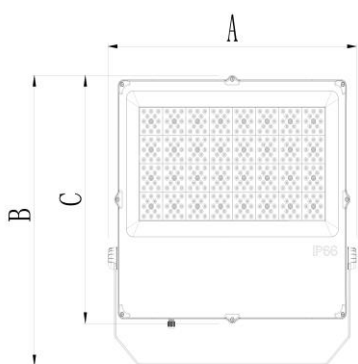

### Specification

Model	FLA-SC200W-T19E	FLA-SC200W-V19E
Colour Temperature	4000K	5000K
Lumen (lm)	24,779lm	25,545lm
Efficiency (lm/w)	>124lm/w	>128lm/w
Light Source	LED	
CRI (%)	≥80	
Beam Angle	120°	
Power Requirement	90~305VAC	
Power Consumption	199.2w	
Dimmable	No	
Housing	Diecast aluminium with toughened glass lens	
Lifespan	>50,000 hours	
Operation Temperature	-20°C~+60°C	
Product Dimension	445 x 392 x 56mm	
Impact Rating	IK08	
Weight	5.4kg	
Protection Rating	IP66	
Warranty	5 Years	

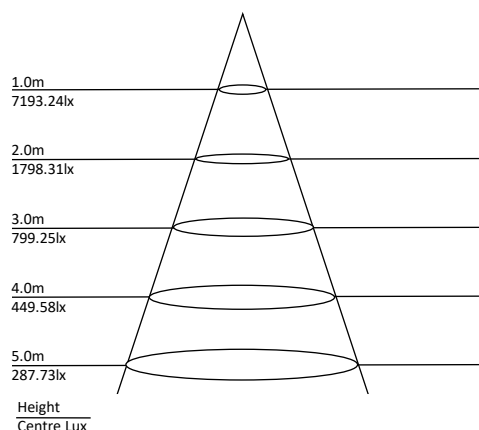

Specifications are subject to change without notice